


Self-regulating heating cables

Electrical trace-heating for frost protection without steam cleaning.

The BTV-family of self-regulating, parallel circuit heating cables is used for frost protection of pipes and vessels.

It can also be used for process temperature maintenance up to 65°C.

Heating cable construction

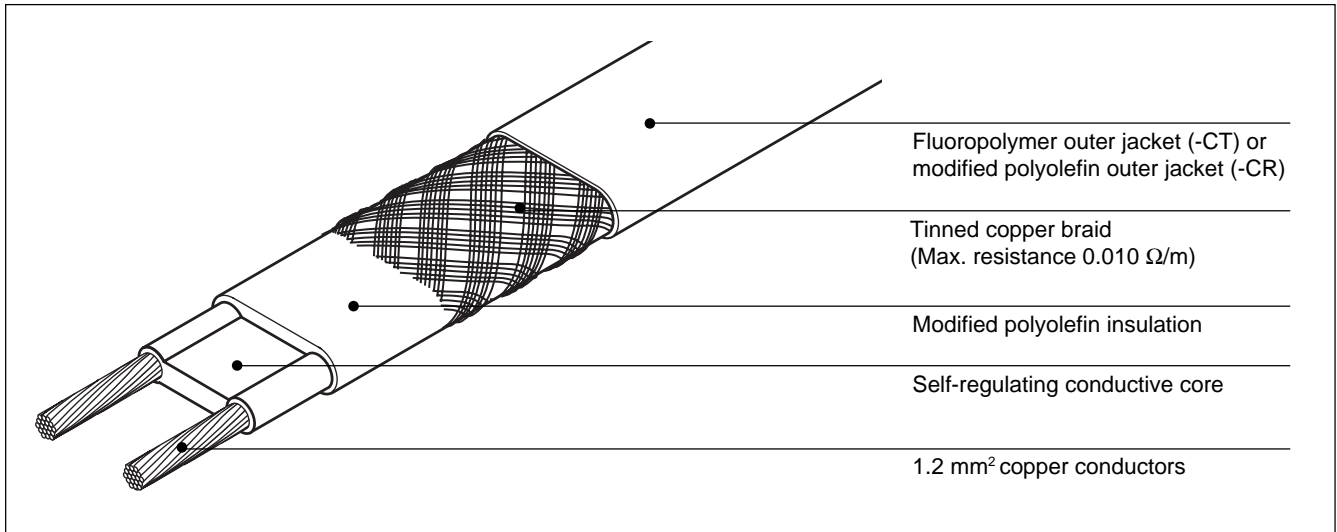

Application

Area classification	Hazardous, Zone 1 or Zone 2 Ordinary
Traced surface type	Carbon steel Stainless steel Plastic Painted
Chemical resistance	For organic corrosives: use -CT (fluoropolymer outer jacket) For mild inorganic solutions: use -CR (modified polyolefin outer jacket) For aggressive organics and corrosives consult your local Raychem Representative

Supply voltage

230 Vac (Contact your local Raychem Representative for data on other voltages)

Approvals

The BTV heating cables are approved for use in hazardous areas Zone 1 and Zone 2 by PTB and BASEEFA. They are also VDE approved.



II 2 G EEx e(m) II T6
PTB 98 ATEX 1102 X



II 2 G EEx e II T6
BAS98ATEX2338X


Specifications

Maximum exposure temperature (Continuous power on)	65°C
Maximum exposure temperature (Intermittent power on)	85°C Maximum cumulative exposure 1000 hours
Temperature classification	T6 in accordance with European Standard EN 50 014
Minimum installation temperature	-60°C
Minimum bend radius	at 20°C: 12.7 mm at -40°C: 35.0 mm

Thermal output rating

Power output at
230 Vac on insulated
steel pipes

- A 10BTV2-CT
10BTV2-CR**
- B 8BTV2-CT
8BTV2-CR**
- C 5BTV2-CT
5BTV2-CR**
- D 3BTV2-CT
3BTV2-CR**

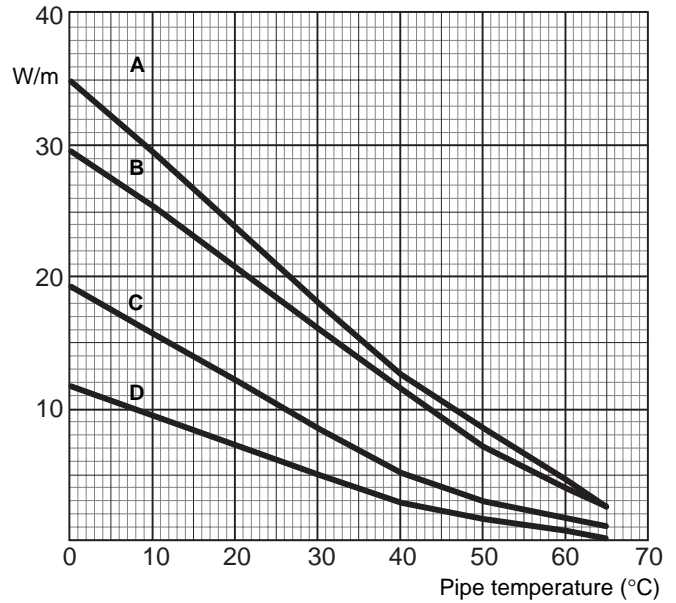

To choose the correct heating cable for your application use the Selection guide for industrial trace-heating systems. For more detailed information, use the TraceCalc software.

	3BTV2-CR 3BTV2-CT	5BTV2-CR 5BTV2-CT	8BTV2-CR 8BTV2-CT	10BTV2-CR 10BTV2-CT
Power output (W/m at 10°C)	9	16	25	30

Product dimensions (nominal) and weight

	3BTV2-CR 3BTV2-CT	5BTV2-CR 5BTV2-CT	8BTV2-CR 8BTV2-CT	10BTV2-CR 10BTV2-CT
Thickness (mm)	5.5	5.5	5.5	5.5
Width (mm)	10.5	10.5	15.4	15.4
Weight (g/m)	110	110	153	153

Maximum circuit length

Electrical protection sizing	Start-up temperature	Maximum heating cable length per circuit (m)			
16A	-20°C	155	110	70	45
	+10°C	200	165	105	65
20A	-20°C	195	140	85	55
	+10°C	200	165	120	85
25A	-20°C	200	165	110	65
	+10°C	200	165	120	105
32A	-20°C	200	165	120	85
	+10°C	200	165	120	105

The above numbers are for circuit length estimation only. For more detailed information please use the Raychem TraceCalc software or contact your local Raychem representative.

Raychem requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Components

Raychem offers a full range of components for power connections, splices and end seals. These components must be used to ensure proper functioning of the product and compliance with electrical requirements.